
PRODUCT SPECIFICATION

PRO4500

SWING GATE OPERATOR

Residential / Light Commercial Swing Gate Operator

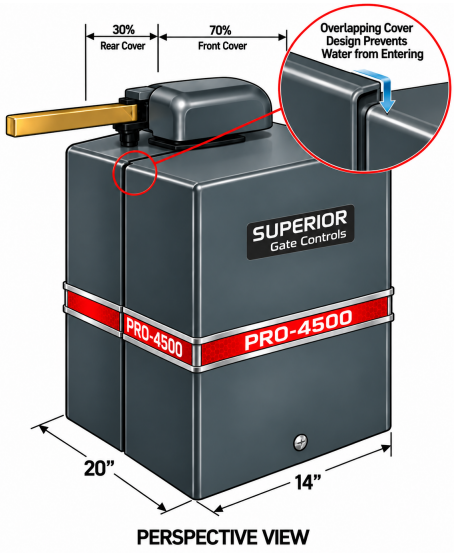

PERSPECTIVE VIEW

List of Parts

- PRO4500 Swing Gate Operator
- 12V DC Motor and Modular Control Board
- Sealed 12V, 7Ah Battery
- Non-Scissor Action Arm
- Radio Receiver with Antenna Kit
- Preprogrammed Remotes
- Reflective or Battery True Beam Photo Eye
- Lockable Release Arm
- Options Available: Metal Mounting Stand

FEATURES

Heavy-Duty Frame
Welded 1/4-inch metal frame with powder-coated finish.

Non-Scissor Action Arm
Arm geometry designed to avoid crossing during gate travel.

Modular Control Board
LED indicators show operator input and output functions.

Adjustable Auto Close
Timer-to-close adjustment from 0 to 60 seconds.

Obstruction Response
Adjustable open and close sensing. Reverses or stops on contact with an object; obstruction alarm.

Accessory Connections
Safety, free-exit and loop connections, dedicated stop input and 12V accessory power.

SPECIFICATIONS

Model	PRO4500
Motor Voltage	12V DC
Motor Power	120W
Motor Type	Permanent Magnet Worm Gear
Motor Gearbox	RV-40 Gear Reducer
Battery	Sealed 12V, 7Ah
Frame	1/4-inch Welded Metal
Frame Finish	Powder Coated
Access Door	Stainless Steel

OPERATING INFORMATION

Application	Residential / Light Commercial
90° Opening Time	15–17 seconds
Daily Operation	Up to 250 cycles with transformer
Auto Close Timer	0–60 seconds
Maximum Gate Length	16 ft
Maximum Gate Weight	800 lbs
Safety Response	Reverse / Stop with Alarm
Control Board	Modular with LED Indicators

Available accessories and system configuration should be confirmed when ordering.